#### DATA SHEET

# MODEL SFI SIGHT FLOW INDICATOR



### **Model SFI Sight Flow Indicator**

Sight flow indicators are used to provide a visual indication of the flow. By checking the spin speed of the indicator the user will get a relative idea of the flow rate.


These units are designed for use with fuel oil (diesel).

## **Specifications:**

- Bronze Body
- Tempered glass window on both sides
- Fluoroelastomer gasket
- ABS Indictor
- Temperature limit: 200 degree F
- Pressure limit: 150 psi
- Mounting Options: Horizontal or Vertical

Mode	Siz	Leng	Weig
1	е	th	ht
Num			
ber			
SFI-	1⁄2"	4.063	2.6
050		"	lbs.
SFI-	3⁄4"	4.063	2.6
075		"	lbs.
SFI-	1"	4.375	3.0
100		"	lbs.
SFI-	1-	4.375	3.0
125	1/4 "	"	lbs.
SFI-	1-	5.5"	7.0
150	1/2 "		lbs.
SFI-	2"	5.5"	7.0

Subject to change at any time without notice

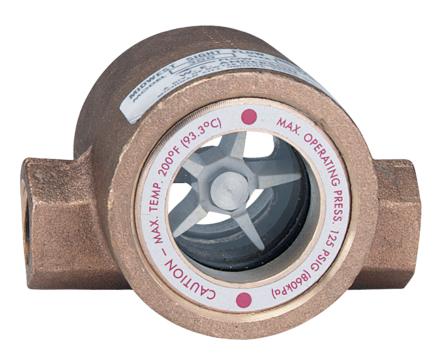

SFI-08-16 Rev. A

#### For All Your Mission Critical Fuel Oil Equipment Needs

Critical Fuel Systems • 200 Industrial Drive, Butner, North Carolina 27509-2500 • 919.575.6711 • criticalfuelsystems.com

200 lbs.

(NOTE: Not to be used with systems where pressures can spike to over 150 psi!)

